DS-KAB673-WEQR
Peripheral Module



- Supports call function
- Supports controlling door by keyfob
- Applicable with DS-K1T673 series.


▪ Specification

Network	
Wireless Network	868 MHz
General	
Working temperature	-30 °C to 60 °C (-22 °C to 140 °F)
Dimensions	110.5 mm × 23.7 mm × 48.1 mm (4.35" × 0.93" × 1.89")
Working humidity	0 to 90% (no condensing)
Function	
Barcode recognition	Support Format: Code 128, Interleaved 2 of 5, Matrix 2 of 5 , Code 39, Codebar, Code 9 and UCC/EAN-128
QR code recognition	Support

▪ Available Model

DS-KAB673-WEQR

▪ Dimension

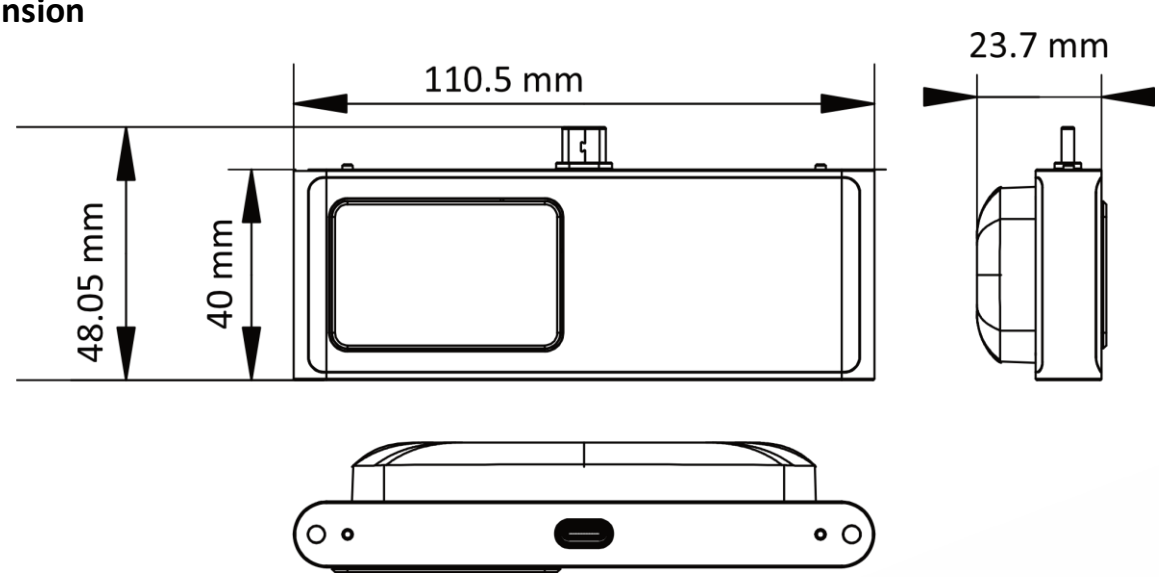

See Far, Go Further

www.hikvision.com
support@hikvision.com

© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

HIKVISION®