HF-S3E(Independent)
Photoelectric Smoke Alarm

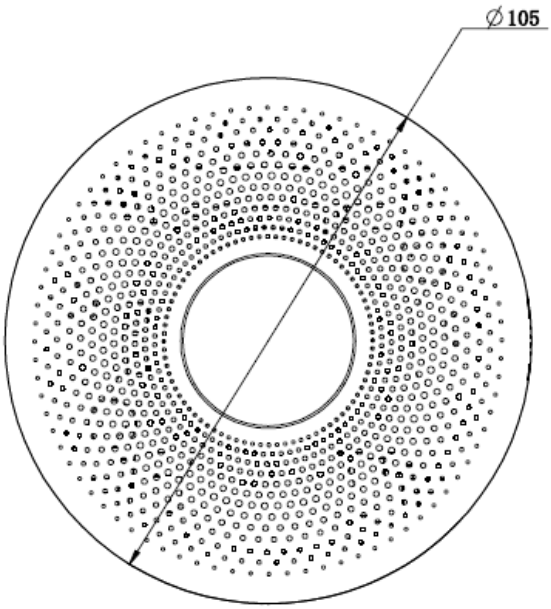


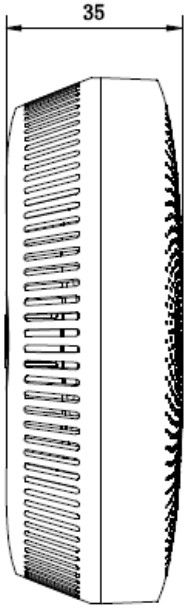
- · With dual light sensing technology, effectively reduce misreports caused by water vapor environment, which is more accurate for smoke sensing alarm.
- · Support smoke alarm.
- · Support local 85dB high decibel alarm sound.
- · Lithium battery power supply, with a long service life up to 10 years in theory.
- · With self-testing feature, user can check the device working status by self-test button.

▪ Specification

Function	
Hush	Yes
Maze dirty alarm	Yes
Low voltage alarm	Yes
Test	Yes
Battery uninstalled indicator	Yes
Smoke alarm	HF-S3E(Independent):Yes 支持
General	
Power supply	HF-S3E(Independent):3V DC, battery CR123A(replaceable) 3V DC，电池CR123A(可更换)
Battery capacity	HF-S3E(Independent):1600 mAh 1600 mAh
Standby current	HF-S3E(Independent):≤12μA ≤12μA
Execution Standard	HF-S3E(Independent):EN 14604：2005 AS 3786：2023 EN 14604：2005 AS 3786：2023
Alarm current	HF-S3E(Independent):≤50 mA ≤50 mA
Alarm mode	HF-S3E(Independent):Audible & visual alarm 声光报警
Battery Life	HF-S3E(Independent):Ten-year battery life under normal operation 10年电池寿命（正常情况下）
Operation temperature	HF-S3E(Independent):-10 °C to 55 °C (14 °F to 131 °F) -10 °C to 55 °C (14 °F to 131 °F)
Operation humidity	HF-S3E(Independent):≤95% relative humidity (RH) ≤95% 湿度 (RH)
Dimension (ϕ × H)	HF-S3E(Independent):105 mm × 35 mm (4.13" × 1.38") 105 mm × 35 mm (4.13" × 1.38")
Alarm sound level	HF-S3E(Independent):≥ 85 dB@3 m (A-Weighted) ≥ 85 dB@3 m (A-Weighted)
weight	HF-S3E(Independent):103.7 g (0.23 lb) (with battery) 103.7 g (0.23 lb) (含电池)
Installation	Ceiling mounted

▪ Dimension


∅105


35

See Far, Go Further

www.hikvision.com
support@hikvision.com

© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

HIKVISION®