DS-K1T673DWX
Pro Face Access Terminal



Face recognition terminal is a kind of access control device. It can be widely applied in multiple scenarios, such as enterprises, stations, dwellings, factories, schools, campus and so on.

- 7-inch LCD touch screen,2 Mega pixel wide-angle lens
- Recognition distance: 0.3 to 3 m
- Face recognition duration < 0.2 s/User
- Face recognition accuracy rate ≥ 99%
- Built-in M1 card, Felica card, and DESfire card reading module (Presents card on the screen to authenticate)
- Face mask detection
- 10,000 face capacity, 10,000 fingerprint capacity (With fingerprint module), 50,000 card capacity, and 150,000 event capacity
- Supports ISAPI, ISUP 5.0, TCP/IP (IPv4 and IPv6) Supports Push SDK. Supports the following SIP servers: ASTERISK, 3CX, ELASTIX, miniSipServer, Brekeke, OpenSIPs, Kamailio. Supports face duplicate check, preventing multiple people from using the same face. Supports attendance-only function. Supports customed Wiegand parameters.
- Supports single person and multiple people (Up to 5 people) recognition

▪ Specification

Display	
Screen size	7 inch
Operation method	Capacitive touch screen
Type	IPS
Video	
Lens	2
Resolution	2 MP
FOV	HFOV = 75.5°; VFOV = 41.5°; DFOV = 87°
Audio	
Audio quality	Built-in omnidirectional microphone
Network	
Wired network	Support
Wi-Fi	Support, 2.4 G, 802.11b/g/n
Interface	
Network interface	1 RJ-45, 10/100/1000 M self-adaptive
Lock control	1
Exit button	1
Door contact input	1
Alarm input	2
Alarm output	1
TAMPER	1
RS-485	1 RS-485. Supports OSDP protocol version V2.1.7, Baud 9600, 19200, 38400
Wiegand	1 Wiegand(Hik 26bit,Hik 34bit)
USB	1 (For Module)
Audio output interface	1 (3.5 mm)
Authentication	
Card type	M1 card,DESfire card,Felica card
General	
Power supply	12 VDC to 24 VDC, 2 A
Working temperature	-30 °C to 60 °C (-22 °F to 140 °F)
Working humidity	0 to 90% (no condensing)
Protective level	IP65
Dimensions	110.5 mm × 209.2 mm × 24 mm (4.35" × 8.24" × 0.94")
Weight	Gross Weight：1.06 kg (2.34 lb) Net Weight：0.57 kg (1.26 lb)
Language	English, Spanish (South America), Arabic, Thai, Indonesian, Russian, Vietnamese, Brazilian Portuguese, Japanese, Korean, Chinese Traditional, French, Turkish, Kazakh and Uzbek.
Function	
Face anti-spoofing	Support

▪ Available Model

DS-K1T673DWX

DS-K1T673DWX/TW

DS-K1T673DWX/CHILE


DS-K1T673DWX(ESD)

DS-K1T673DWX/ANH NGOC T/RJ

DS-K1T673DWX/UTG/HK

DS-K1T673DWX/HKT PCCW

▪ Dimension

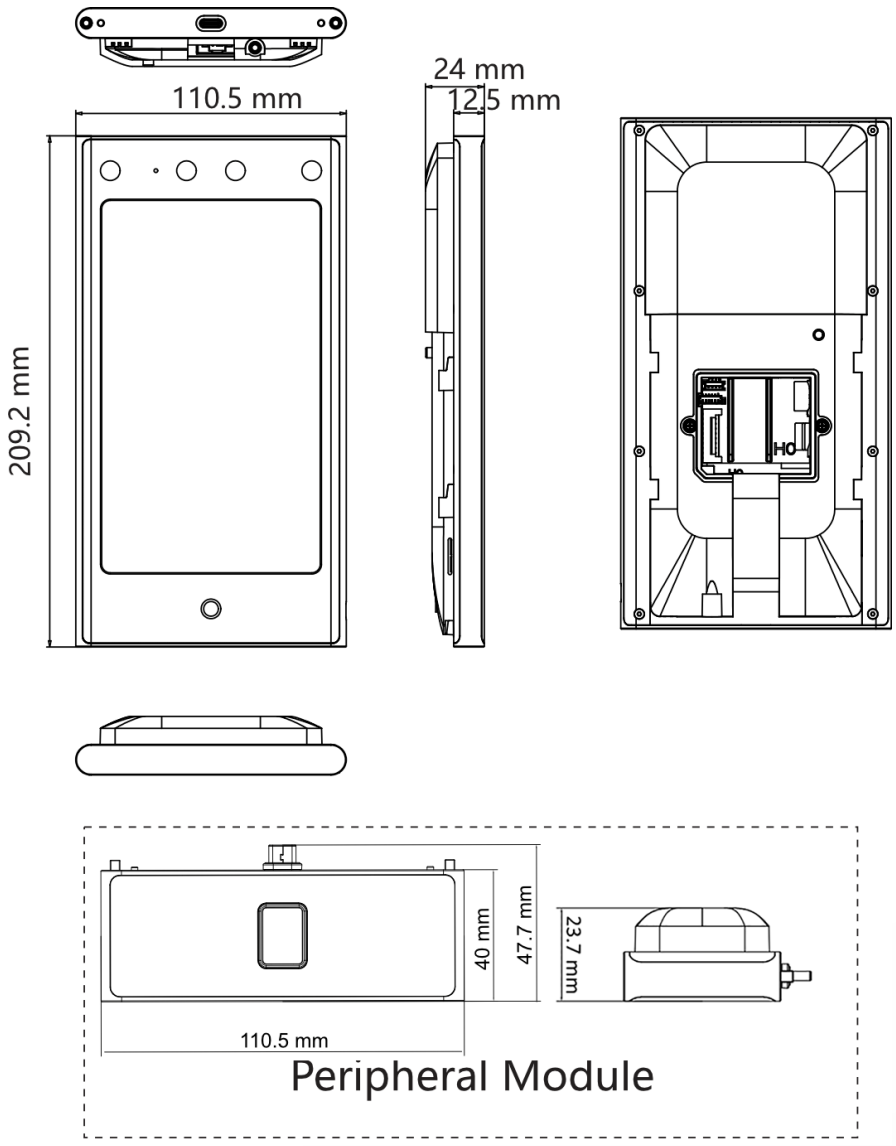

▪ Accessory

▪ Optional

DS-KAB673-S1	DS-KAB6-ZU3	DS-KAB673-A	DS-KAB673-P	DS-KAB673-EDB
				

DS-KAB6-D1	DS-KAB673-FBQR	DS-KAB6-ZU1	DS-KAB6-W1	DS-KAB673-B
				

DS-KAB673-FB	DS-KAB673-BQR
	

See Far, Go Further

www.hikvision.com
support@hikvision.com

© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

HIKVISION®