# DS-D4729CF-1AC

**500x1000 aries rental outdoor cabinet P2.9 with curve lock**

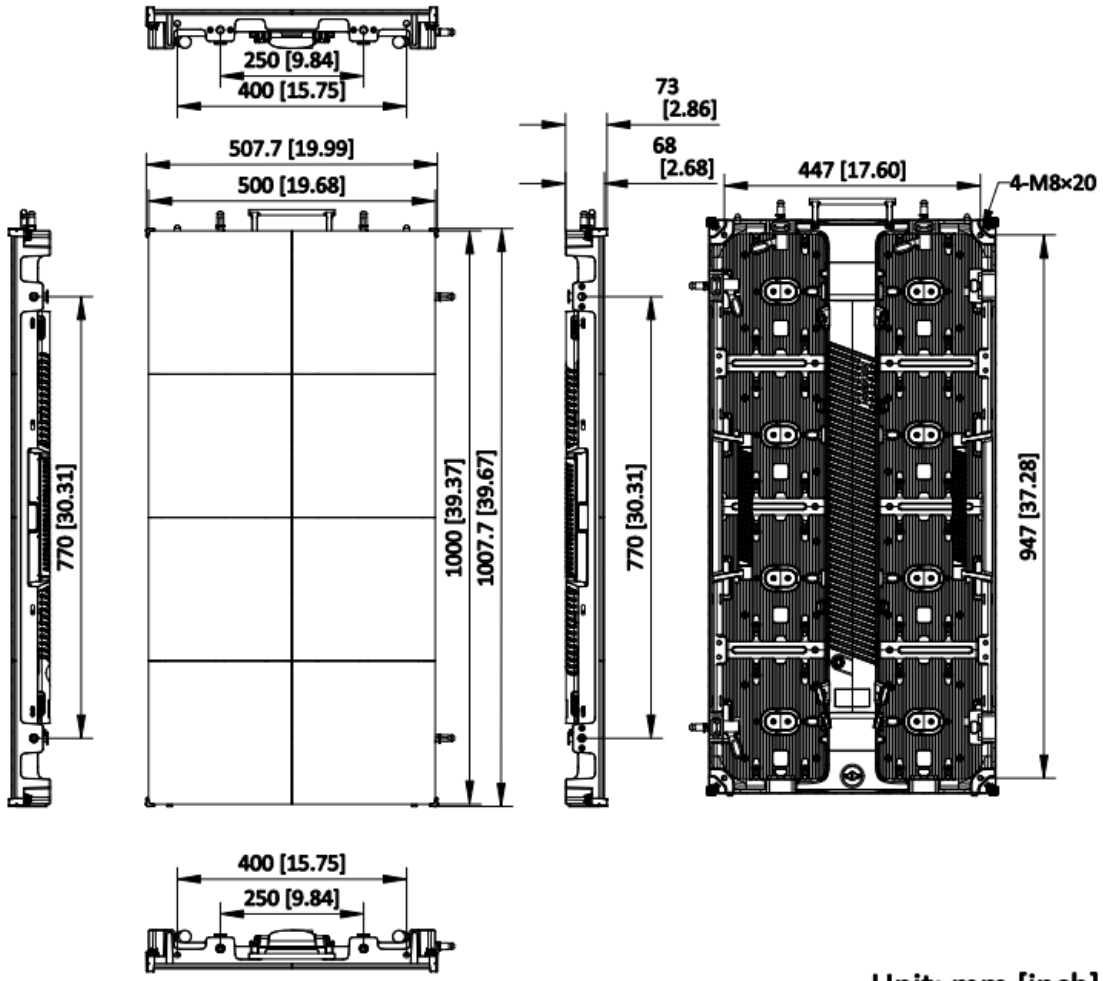


- High precision aluminum alloy cabinet, ultra-thin and lightweight, 1000mm cabinet weight < 13kg, thickness only 69mm
- ± 10 ° integrated curve lock, 500mm and 1000mm cabinets can be assembled
- Up to 4500nit brightness, 7680Hz refresh rate, excellent contrast and color performance bring an immersive stage experience
- Fully modular design, innovative module pop-up button, all components can be quickly assembled, disassembled, and maintained within 5 seconds
- Simple and stable appearance, efficient disassembly and assembly experience, sturdy and stable box design, focusing on providing overall LED display solutions for events such as conferences, stages, product launches, and real estate

## ▪ Specification

| | |
|---|---|
| **Cabinet** | |
| Pixel Configuration | SMD Triad LED |
| Pixel Pitch Category | P2.9 |
| Pixel Pitch | 2.9762 mm |
| Modules Component | 2 × 4 |
| Dimensions (W × H × D) | 500mm × 1000mm × 69mm |
| Resolution | 168 × 336 |
| Area | 0.5 m² |
| Weight | 13.34 kg |
| Pixel Density | 112896 dots/m² |
| Lamp Board Housing | With housing |
| Cabinet Material | Die-casting Aluminium |
| Maintenance Method | Rear maintenance |
| Protection Level | IP65 |
| **Display** | |
| White Balance Brightness | 4500 cd/㎡ |
| Color Temperature | 6500K adjustable |
| Viewing Angle | Horizontal 160°, vertical 140° |
| Contrast Ratio | ≥ 6000:1 |
| Color Uniformity | ≤ ± 0.003Cx, Cy |
| Brightness Uniformity | ≥ 97% |
| **Processing Performance** | |
| Driving Method | 1/21 |
| Frame Frequency | 50/60 Hz |
| Refresh Rate | 7680 Hz |
| Grey Level | 14-bit |
| **Key Material** | |
| Lamp Encapsulation | SMD2020 |
| Control System | Hikvision |
| **Power** | |
| Power Supply | 110~220 VAC ± 15% |
| Max. Consumption | ≤580 W/m² (4500nits) |
| Average Consumption | ≤194 W/m² |
| **Working Environment** | |
| Working Temperature | -20 ℃ to +45 ℃ (-4 ℉ to + 113 ℉ ) |
| Working Humidity | 10% ~ 90%RH (No condensation) |
| Storage Humidity | 10% ~ 90%RH (No condensation) |
| Storage Temperature | -40 ℃ to + 60 ℃ (-40 ℉ to + 140 ℉ ) |
| **General** | |
| Gross Weight | 110 kg /5 in 1 |
| Package Dimension (W × H × D) | 1092 (W) mm × 610 (H) mm × 580 (D) mm |

## ▪ Dimension



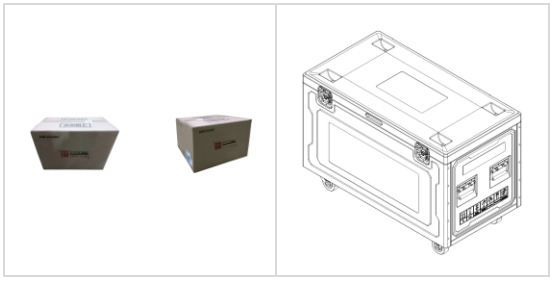

Unit: mm [inch]

| SCALE | 1:2 |
|---|---|

## ▪ Accessory

### ▪ Optional

| DS-DPRSS-1N/HB05/CB | DS-DPRSS-1N/HBBS05/CB | DS-DPRSS-1N/HBBS05/FC | DS-DPRSS-1N/HB05/FC | DS-D4729CD-1A/M |
|---|---|---|---|---|
|  |  |  |  |  |
| DS-D47XXCF-1A/A2 | DS-D47XXCF-1A/A1 | | | |



See Far, Go Further

www.hikvision.com
support@hikvision.com

© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

HIKVISION®